Product Series :	**GBC**	**Brand :**	GOTREND
File Version :	GBC-SERIES	**Prepared by :**	Yinghui Guo
Established Date	2021.04.27	**Description :**	SMD Ferrite Bead
Latest Edit Date :	2026.04.22	**Product Type :**	☑ Standard ☐ Customize

Version Information :

SN	Date	Version Code	Modify Description	Checked by	Approved by
01	2021.04.27	V1R0	New version update release	David Wang	Toby Zhang
01	2025.04.25	V1R1	GBC302922P-Series reel changed from original Reel 7x12mm to 13x12mm.	Yinghui Guo	Toby Zhang
02	2025.06.23	V1R2	GBC473129P-SERIES, The reel has been changed from the original Reel 7x12mm to 13x12mm.	Yinghui Guo	Toby Zhang
03	2026.04.22	V1R3	Add GBC322521P-Series, GBC423022P-SERIES, GBC473129PM-Series.	Toby Zhang	Toby Zhang

⚠ REMINDERS

- Product information in this catalog is subject to change without notice, and is for reference only. Therefore, please contact GOTREND Technology to check for the latest information before practical application or usage of the products.
- This catalog contains only typical specifications, please contact GOTREND Technology for further details if you can not find special components or information you need in this catalogue. Please also approve our product specifications or transact the approval sheet for product specifications before ordering.
- This catalogue only applies to products purchased through GOTREND Technology or its official agencies. This catalogue does not apply to products that are purchased through other third parties.
- Please read Attention and CAUTION note (for storage, operating, rating, soldering, mounting and handling) in this catalog to ensure product proper usage.
- GOTREND Technology is not responsible for issues that occur related to the intellectual property rights or other rights of our company or a third party when you use a product listed in this catalog. GOTREND Technology do not grant license of these rights.
- Information and data provided in the brochure can and do vary in different applications, and actual performance may vary over time.
- "Delivery Specification" illustrating precautions for the specifications and safety of each product listed in this catalog is available and we strongly recommend to provide these delivery specifications with customers that use these products.
- For exporting of product in this catalog, please take note it may be a restricted item according to the “Foreign Exchange and Foreign Trade Control Law”. In such cases, it is necessary to acquire export permission in accordance to this law.
- Any reproduction or extraction of the contents in this catalog is prohibited without prior permission from GOTREND Technology.
- Products listed in this catalog are intended for general electronic device usage under normal operation and use condition including telecommunication equipment, home appliances, sports equipment AV equipment, industrial machine, office equipment etc. Please take note that our products are not designed, intended or authorized for use in below mentioned applications unless explicitly agreed in writing between the parties to avoid product failure that could result in situation where personal injury or death could occur.

  (1) Aerospace/Aviation equipment
  (2) Atomic energy-related equipment
  (3) Disaster prevention/crime prevention equipment
  (4) Electric heating apparatus, burning equipment
  (5) Medical equipment
  (6) Military equipment
  (7) Power-generation control equipment
  (8) Public information-processing equipment
  (9) Safety equipment
  (10) Seabed equipment
  (11) Transportation control equipment
  (12) Transportation equipment (cars, electric trains, ships, etc.)
  (13) Other applications that are not considered general-purpose applications
- Our manufacturing sites fully compliance with requirement regarding the quality management system in the automotive industry under the IATF 16949 standard. GOTREND Technology respect individual agreements with reference to customer requirements and customer specific requirements (CSR). We will like to emphasize that only requirements mutually agreed upon will in implemented in our Quality Management System taking into consideration that IATF 16949 may appear to support the acceptance of unilateral requirements. We will only legally bind to this individually agreed upon agreement under the IATF 16949 standard.
- The product itself is a powder metallurgy product, so the structure is relatively fragile, and it should not be used for products that are easy to fall. In addition, when this product is assembled, it should avoid collision with the tool or mechanism shell.

- It is not recommended to use hot air gun for disassembling of this product. When using of hot air gun to repair other parts, please also take note that long time or high temperature exposure of this product will also damage the inductance device. If you need to use the hot air gun to disassemble the product, it is recommended to adjust the hot air gun temperature to 380 ℃±5 ℃. The blower head of the hot air gun should be perpendicular and at least 1cm away from the product. After heating the product to the tin material melting point, use tweezers to remove the product from the PCB.

Product Series :	**GBC**	**Brand :**	GOTREND
File Version :	GBC-SERIES	**Prepared by :**	Yinghui Guo
Established Date	2021.04.27	**Description :**	SMD Ferrite Bead
Latest Edit Date :	2026.04.22	**Product Type :**	☑ Standard ☐ Customize

Features & Application :

* SMD Bead Core for High Current Capacity
* Fit for power line & signal line circuit
* To help you go pass the CE/FCC standard.
* PC / IPC / Handheld Device / LowProfile Device / LCD…

(Picture for reference only)

Part No. Example :

PN	:	**GBC**	**302922**	**P**	**W**	**-**	**400**	**N**
ID	:	1	2	3	4		5	6

1 : GOTREND Series : GBC
2 : Type Size Code : 302922 = 3.08 x 2.9 x 2.2 mm
3 : P = Pb free < 1000 ppm
4 : Material Code : [W] [R] [M]
5 : Impedance : 400 = 40.0 Ohm
6 : Tolerance : N = +/-25%

Basic Information :

Made in	China
Pin Foot	SMD
Shielding	Yes
J-STD-020	MSL Level 1
RoHS	Compliant
REACH	Compliant
Halogen	Free

Operating & Storage Condition :

* Operating Temp -40 ~ +125 ℃ (Including self - temperature rise)
* Storage Temp 1. -10 ~ +45 ℃ , 50 ~ 60% RH (Product with taping)
  2. -40 ~ +125 ℃ (On board)
* Storage Life Time 6 Month (Less than 40 ℃ and 60% RH)

Attention & Caution :

* Keep out of Splashing water or salt water
* Avoid Toxic Gas (Hydrogen sulfide, Sulfurous acid, Chlorine, Ammonia)
  Vibrations or shocks which exceed the specified condition
  Dew condense
  Layout near the edge of PCB
  Over flexure after SMT mounting & PCBA
* Pin foot or SMD pad solderablility: Pb free type is best within 6 months after delivery
* Humidity sensitive , IPC/JEDEC J-STD-020 MSL if over Level 1, recommend bake 30mins@150 degree before PCBA
* Caution for human life relative applications : PLS contact & consult with GOTREND team in design stage.

Test Condition :

* Equipment HP4284A , HP42841A - L , Q , DCR , IDC
  HP8753D Network analyzer - SRF

* Standard Atmosphere Conditions:
  Ambient Temperature 20 ± 15 ℃
  Humidity RH 65 ± 20%

* If there may be any doubt on the test result ,
  Measurement shall be made within the following limits:
  Ambient Temperature 25 ± 5 ℃
  Humidity RH 75 ± 10%

Recommend IR Reflow Curve : GTX-IR-FILE001

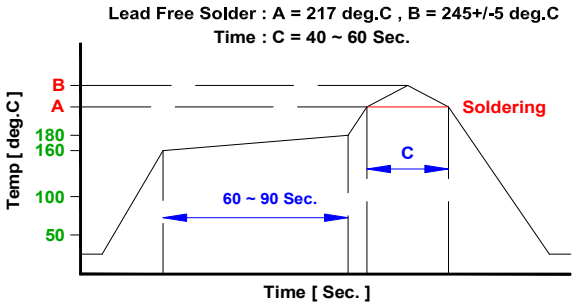

Notice : Iron Soldering , Solder < 30 Watt ,
Direct touch the terminal x 3 Sec. Max. @ 350 deg.C

GBC302922P-SERIES

Dimension [mm] :

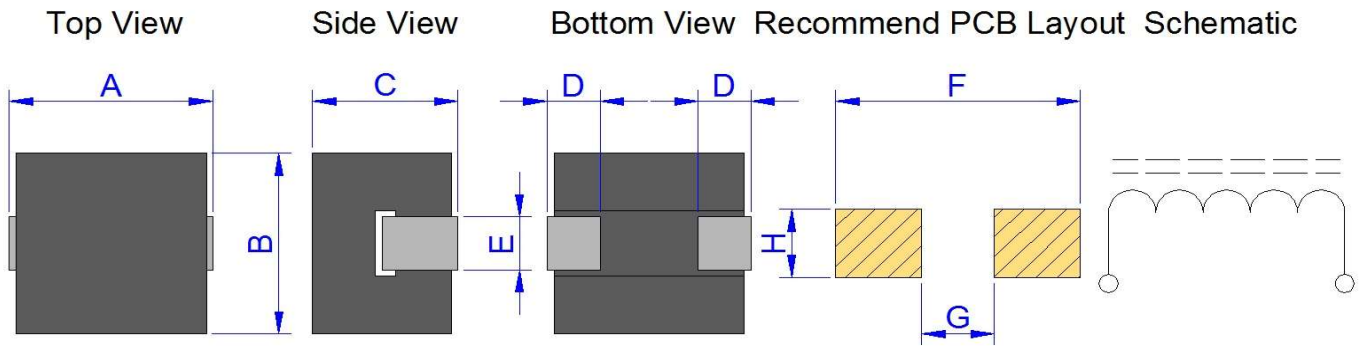

A(+0.1/-0.15)	B(+/-0.1)	C(+/-0.1)	D(+/-0.2)	E(+/-0.1)	F (Ref.)	G (Ref.)	H (Ref.)
3.08	2.90	2.20	0.80	0.85	3.70	1.10	1.10

Electrical Characteristics :

Part No.	Impedance (Ω) (+/-25%) @25MHz	Impedance (Ω) (+/-25%) @100MHz	DCR (mΩ) (Max.)	Rated Current (A) (Typ.)	
				△T=40°C	△T=60°C
GBC302922PW-400N	23.0	40.0	0.6	21.0	26.0

* Rated Current :
(1) Chroma high current test fixture.
* All test data referenced to 25℃ ambient.

Typical Performance Curves :

Typical Impedance v.s. Frequency Curve

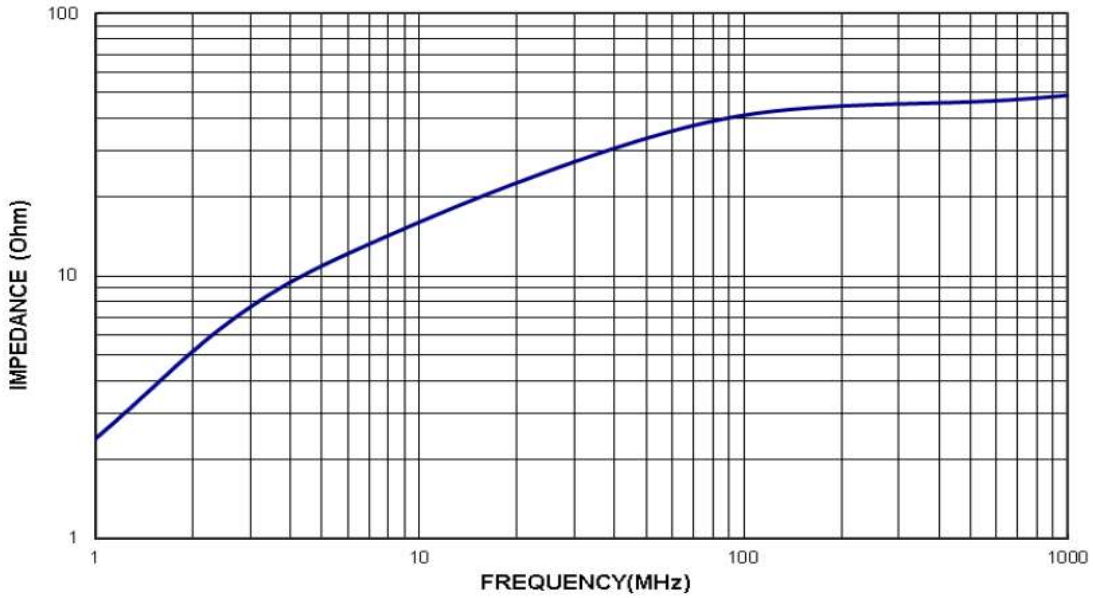

Product Series :	**GBC**	**Brand :**	GOTREND
File Version :	GBC-SERIES	**Prepared by :**	Yinghui Guo
Established Date	2021.04.27	**Description :**	SMD Ferrite Bead
Latest Edit Date :	2026.04.22	**Product Type :**	☑ Standard ☐ Customize

GBC322521P-SERIES

Dimension [mm] :

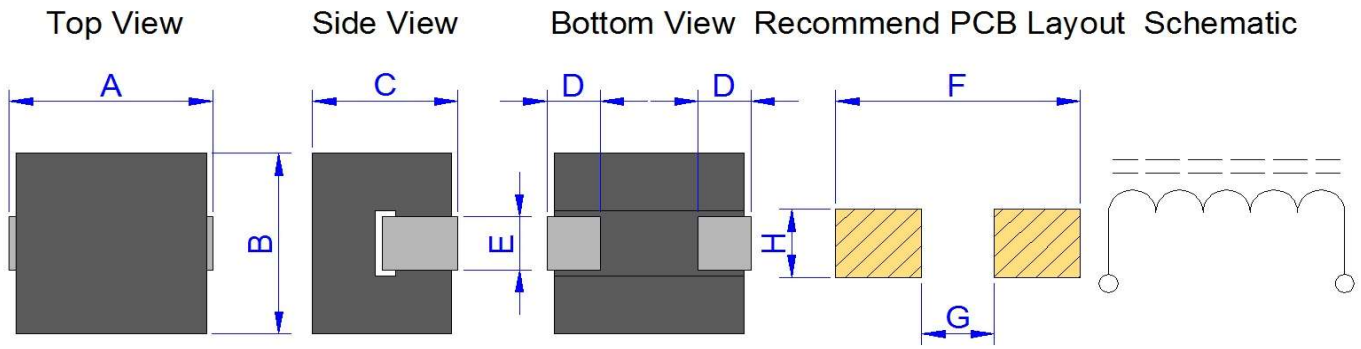

A(+/-0.15)	B(+/-0.15)	C(+/-0.15)	D(+/-0.2)	E(+/-0.1)	F (Ref.)	G (Ref.)	H (Ref.)
3.10	2.50	2.15	0.85	0.70	3.30	1.40	0.80

Electrical Characteristics :

Part No.	Impedance (Ω) (+/-25%) @25MHz	Impedance (Ω) (+/-25%) @100MHz	DCR (mΩ) (Max.)	Rated Current (A) (Typ.) △T=40°C
GBC322521PW-350N	25.0	35.0	0.6	21.0

* Rated Current :
(1) Chroma high current test fixture.
* All test data referenced to 25℃ ambient.

Typical Performance Curves :

Typical Impedance v.s. Frequency Curve

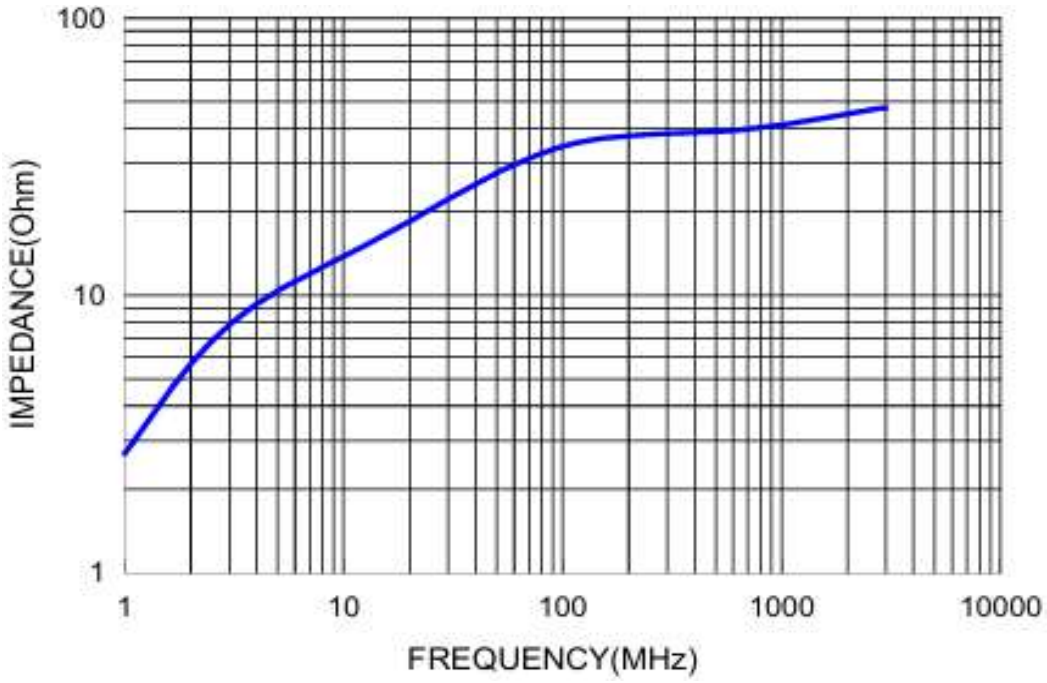

GBC423022P-SERIES

Dimension [mm] :

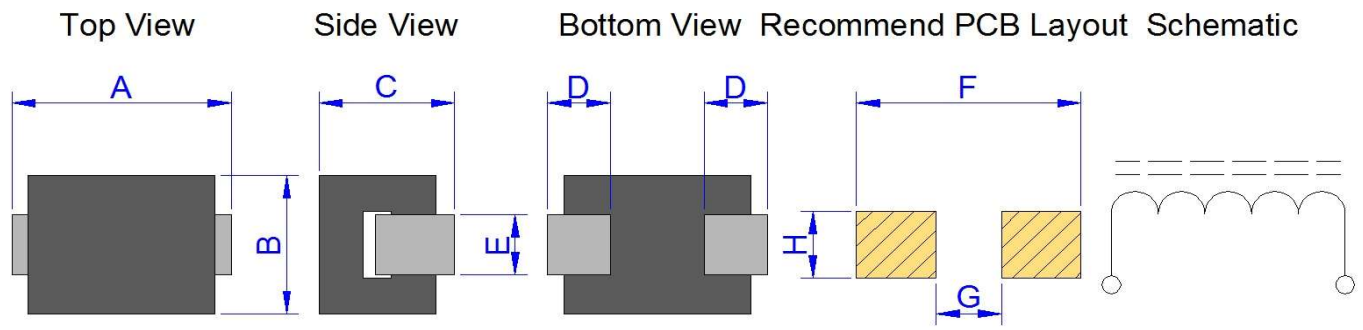

A (+/-0.3)	B (+/-0.15)	C (Max.)	D (+/-0.2)	E (+/-0.15)	F (Ref.)	G (Ref.)	H (Ref.)
4.20	3.00	2.20	1.00	1.25	4.80	2.00	1.50

Electrical Characteristics :

Part No.	Impedance (Ω) (+/-25%) @25MHz	Impedance (Ω) (+/-25%) @100MHz	DCR (mΩ) (Max.)	Rated Current (A) (Typ.)	
				△T=40°C	△T=60°C
GBC423022PR-400N	24.0	40.0	0.7	20.0	28.0

* Rated Current :
(1) Chroma high current test fixture.
* All test data referenced to 25℃ ambient.

Typical Performance Curves :

Typical Impedance v.s. Frequency Curve

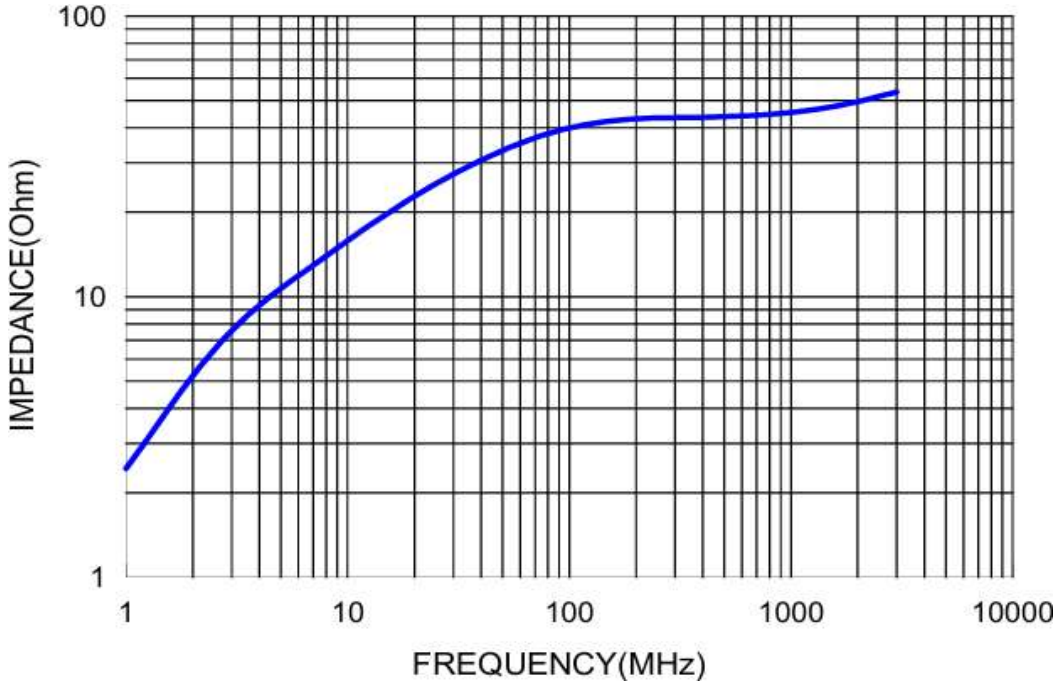

GBC473129PM-SERIES

Dimension [mm] :

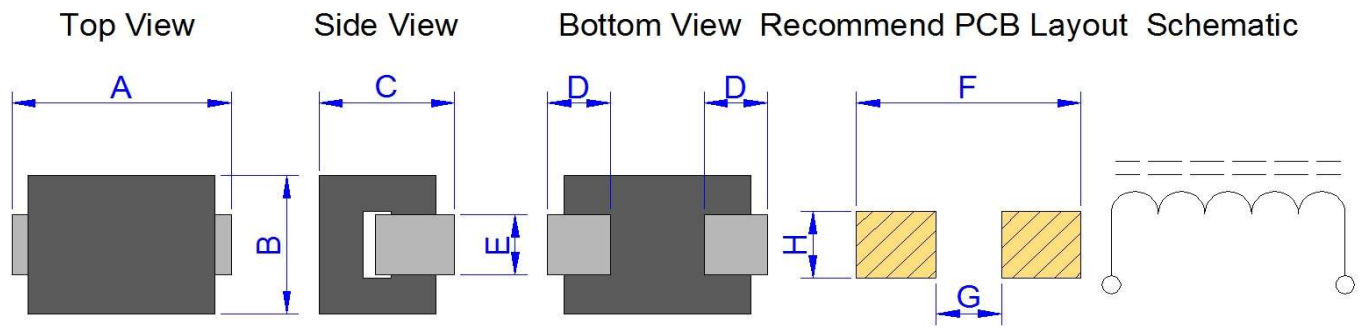

A (+/-0.4)	B (+/-0.15)	C (+/-0.2)	D (+/-0.2)	E (+/-0.15)	F (Ref.)	G (Ref.)	H (Ref.)
4.70	3.10	2.90	1.35	1.35	4.80	1.40	1.50

Electrical Characteristics :

Part No.	Impedance (Ω) (+/-25%) @1MHz	Impedance (Ω) (+/-25%) @10MHz	DCR (mΩ) (Max.)	Rated Current (A) (Typ.)	
				△T=40°C	△T=60°C
GBC473129PM-470N	20.0	47.0	0.75	24.0	28.0

* Rated Current :

(1) Chroma high current test fixture.

Typical Performance Curves :

Typical Impedance v.s. Frequency Curve

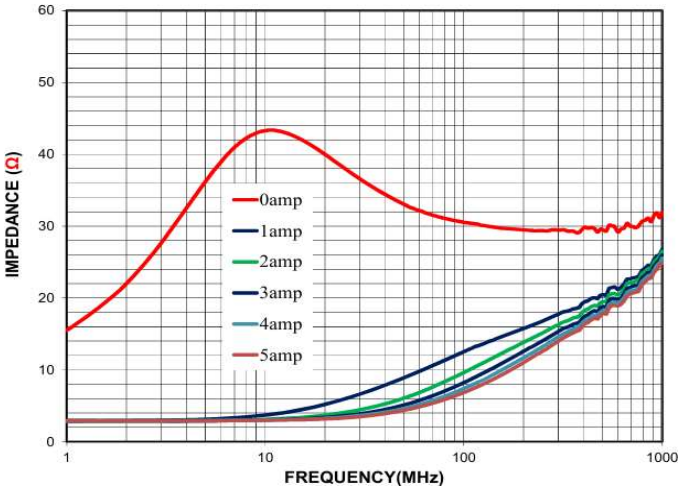

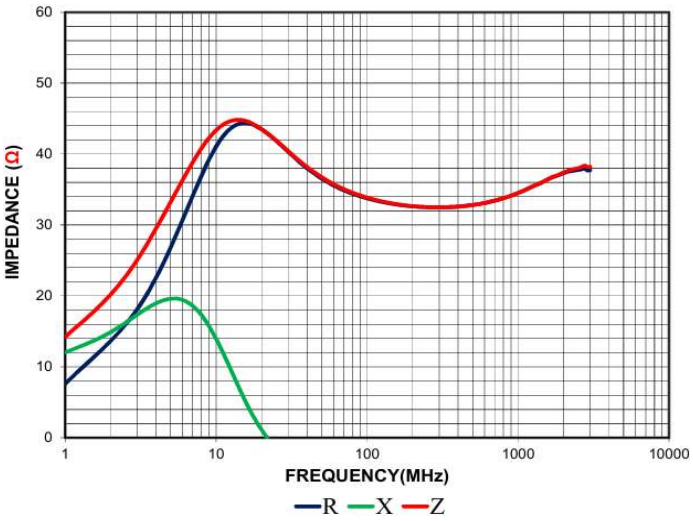

GBC473129PR-SERIES

Dimension [mm] :

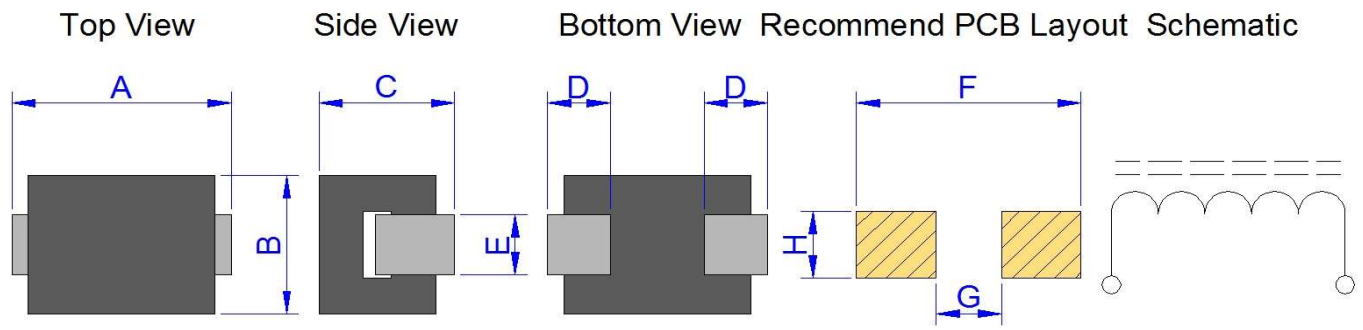

A (+/-0.4)	B (+/-0.15)	C (+/-0.2)	D (+/-0.2)	E (+/-0.15)	F (Ref.)	G (Ref.)	H (Ref.)
4.70	3.10	2.90	1.35	1.35	4.80	1.40	1.50

Electrical Characteristics :

Part No.	Impedance (Ω) (+/-25%) @25MHz	Impedance (Ω) (+/-25%) @100MHz	DCR (mΩ) (Max.)	Rated Current (A) (Typ.)	
				△T=40°C	△T=60°C
GBC473129PR-530N	35.0	53.0	0.6	35.0	45.0

* Rated Current :

(1) Chroma high current test fixture.

Typical Performance Curves :

Typical Impedance v.s. Frequency Curve

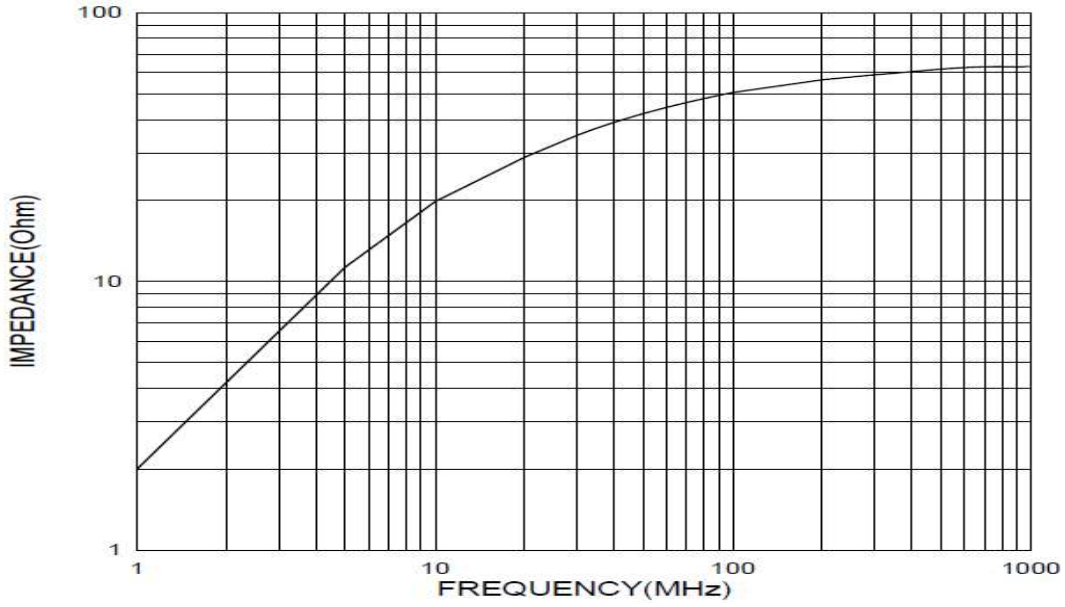

GBC903028P-SERIES

Dimension [mm] :

Top View Side View Bottom View Recommend PCB Layout Schematic

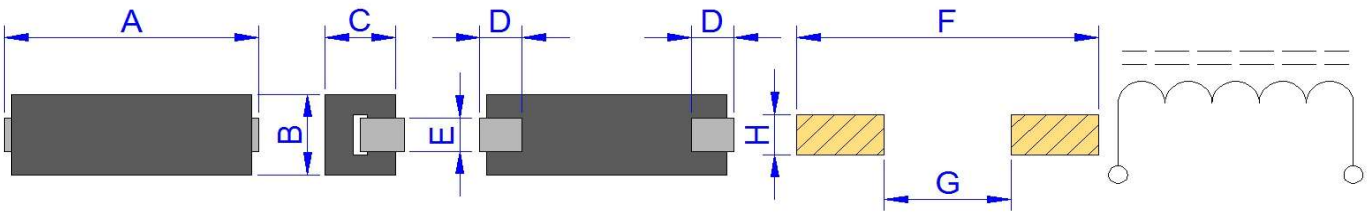

A (+/-0.4)	B (+/-0.15)	C (+/-0.25)	D (+/-0.5)	E (+/-0.2)	F (Ref.)	G (Ref.)	H (Ref.)
9.00	3.00	2.80	1.50	1.25	10.7	4.50	1.50

Electrical Characteristics :

Part No.	Impedance (Ω) (+/-25%) @25MHz	Impedance (Ω) (+/-25%) @100MHz	DCR (mΩ) (Max.)	Rated Current (A) (Typ.)	
				△T=40°C	△T=60°C
GBC903028PR-101N	65.0	100.0	1.0	30.0	40.0

* Rated Current :

(1) Chroma high current test fixture.

Typical Performance Curves :

Typical Impedance v.s. Frequency Curve

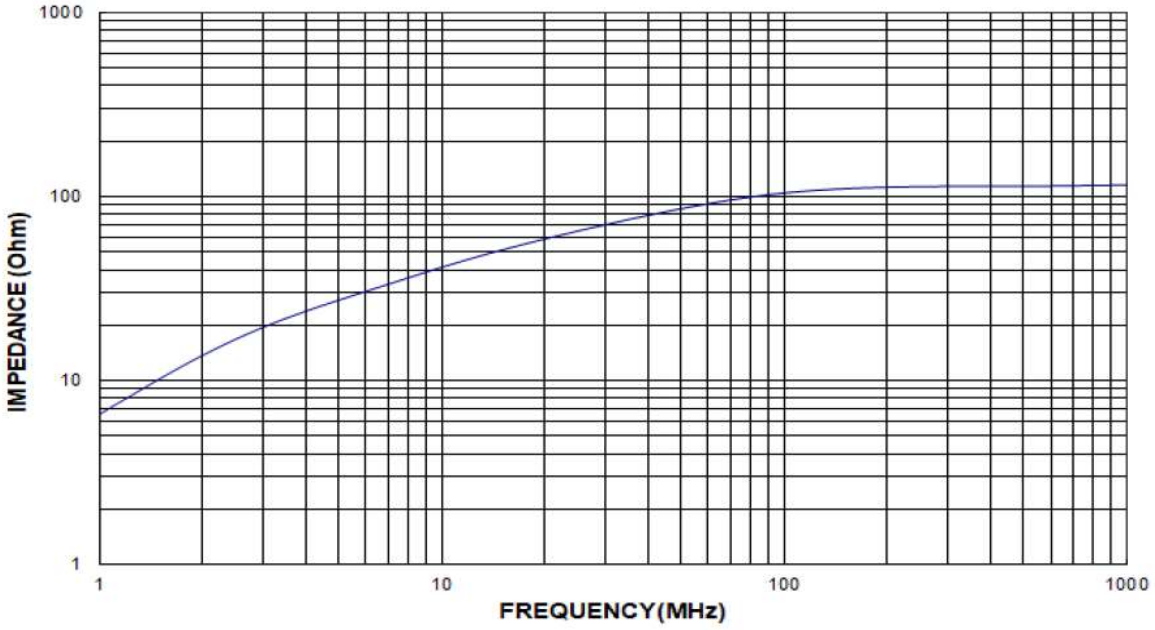

Care note :

Care note for Use :

(1) Storage Condition :

Temperature 25 to 35 °C , Humidity 45 to 60% RH

(2) Use Temperature :

a. Minimum Temperature : -40 ℃ Ambient temperature of this product.

b. Maximum Temperature : +125 ℃ The value of temperature including ambient and temperature rise of this product.

c. Reliability test temperature range from -40 ~ +125 ℃

d. However, this is not meant as temperature grade guarantee for UL.

(3) Model :

When this product was used in a similar or as new product to the original one, sometimes it might be unable to satisfy the specifications due to difference in condition of usage.

(4) Drop :

If this product suffered mechanical stress such as drop, characteristics may become poor (due to damage on coil / bobbin / ferrite … etc.)

Never use such stressed product.

Care note for Safety :

(1) Provision to Abnormal Condition :

This product itself does not have any protective function in abnormal condition such as overload, short-circuit and open-circuit conditions, etc.

Therefore, it shall be confirmed from the end product that there is no risk of smoking, fire, dielectric withstand voltage insulation resistance,etc. in abnormal conditions to provide protective devices and /or protection circuit in the end product.

(2) Temperature Rise :

Temperature rise on this product depends on the installation condition on end products.

It shall be confirmed on the actual end product that temperature rise of this product is within the specified temperature class limit.

(3) Dielectric Strength :

Dielectric withstanding test with higher voltage than specific value will damage insulating material and shorten its life.

(4) Water :

This product must not be used in wet condition resulted from water, coffee or any liquid contact because insulation strength becomes very low under such condition.

(5) Potting :

If this product is potted in some compound, coating material of magnet wire might be occasionally damaged. Please ask us if you intend to pot this product.

(6) Detergent :

Please consult our company immediately once under such circumstances because product reliability confirmation etc. is needed when this product come in contact with these chemicals.

Reliability :

<table>
<tr><th>SN</th><th>Test Item</th><th>Test Condition</th><th>Specification</th></tr>
<tr><td>1</td><td>Dimension</td><td>Actual Size ...</td><td>Meet Spec</td></tr>
<tr><td>2</td><td>Thermal Shock
(Temperature Cycle)</td><td>Temperature : -40 ~ +125 ℃ kept stabilized for 30 min. each
Cycle : 100 Cycles (power off)</td><td>Elec. no variation
Appearance no deformation</td></tr>
<tr><td>3</td><td>Humidity Resistance</td><td>Humidity : 90% ~ 95% RH
Temperature : 60 ± 2 ℃， Test Time : 96 ± 2 Hours</td><td>Elec. no variation
Appearance no deformation</td></tr>
<tr><td>4</td><td>HighTemperature</td><td>Temperature : 125 ± 2 ℃
Testing Time : 96 ± 2 Hours</td><td>Elec. no variation
Appearance no deformation</td></tr>
<tr><td>5</td><td>Low Temperature</td><td>Temperature : -40 ± 2 ℃
Time : 96 ± 2 Hours</td><td>Elec. no variation
Appearance no deformation</td></tr>
<tr><td>6</td><td>Temperature and
Humidity Cycle</td><td><table><tr><th>Temperature</th><th>Humidity</th><th>Time</th></tr><tr><td>25 ℃</td><td>90% ~ 95% RH</td><td>3.0 Hr</td></tr><tr><td>55 ℃</td><td>95% ~ 96% RH</td><td>5.0 Hr</td></tr><tr><td>25 ℃</td><td>90% ~ 95% RH</td><td>3.0 Hr</td></tr></table>Cycle : 20 Cycles</td><td>Elec. no variation
Appearance no deformation</td></tr>
<tr><td>7</td><td>Vibration</td><td>Frequency : 10Hz ~ 55Hz， Amplitude : 1.5 mm
Direction : X， Y， Z， Time : 2 Hours each</td><td>Elec. no variation
Appearance no deformation</td></tr>
<tr><td>8</td><td>Solderability</td><td>Go through real SMT IR-Reflow ....
The profile like our suggest profile.
Preheat : 160 ± 10 ℃ (90 sec)
Peak : 245 ± 5 ℃
Peak Time : 50 Sec. / up 217 ℃</td><td>Elec. no variation
Appearance no deformation</td></tr>
<tr><td>9</td><td>Soldering Heat
Resistance</td><td>Preheat : 160 ± 10 ℃ (90 sec)
Solder : Sn / Ag / Cu (Pb Free)
Solder Temp. : 260 ± 5 ℃， Time : 3 ± 1 seconds</td><td>Elec. no variation
Appearance no deformation</td></tr>
<tr><td>10</td><td>Iron Solder Heat
Resistance</td><td>Solder Temp. : 350 ± 5 ℃
Flux : Rosin， Time : 3 ± 1 seconds</td><td>Elec. no variation
Appearance no deformation</td></tr>
<tr><td>11</td><td>Bending Strength</td><td> 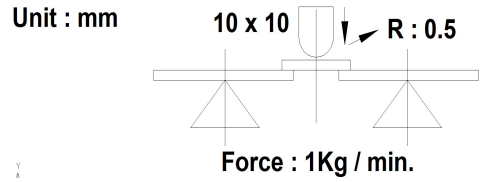
</td><td>Elec. no variation
Appearance no deformation</td></tr>
<tr><td>12</td><td>Flexure Strength</td><td> 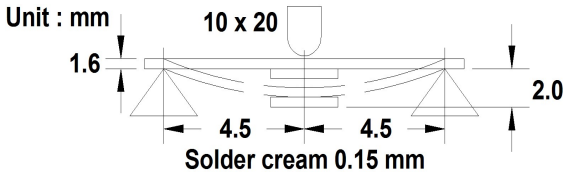
</td><td>Elec. no variation
Appearance no deformation</td></tr>
<tr><td>13</td><td>Terminal Strength</td><td> 
</td><td>Elec. no variation
Appearance no deformation</td></tr>
<tr><td>14</td><td>Load life</td><td>Temperature : 25 ± 3 ℃
Load : Allowed DC Current， Test Time : 96 ± 2 Hours</td><td>Elec. no variation
Appearance no deformation</td></tr>
</table>

Product Series :	**GBC**	**Brand :**	GOTREND
File Version :	GBC-SERIES	**Prepared by :**	Yinghui Guo
Established Date	2021.04.27	**Description :**	SMD Ferrite Bead
Latest Edit Date :	2026.04.22	**Product Type :**	☑ Standard ☐ Customize

Packaging Information :

Tape Dimension (mm)

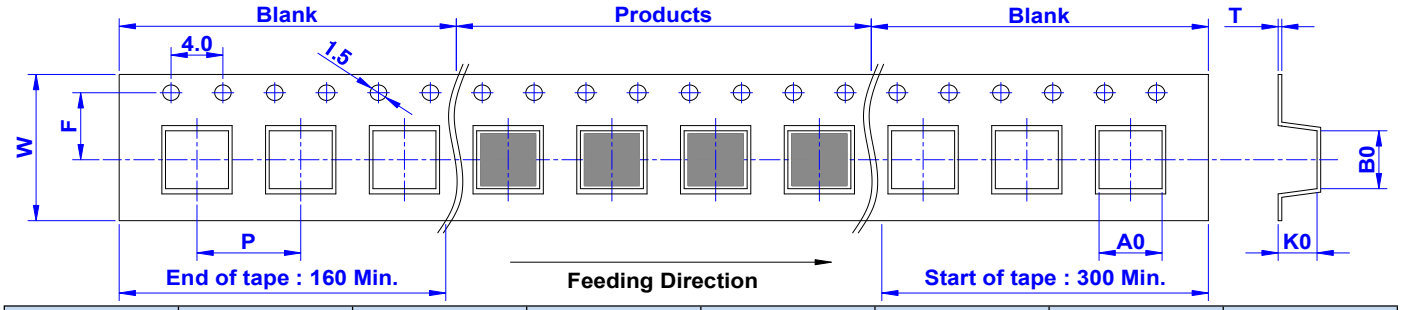

SIZE/mm	W	P	A0	B0	K0	T	F
302922	12.00	8.00	3.00	3.40	2.31	0.25	5.50
322521	8.00	4.00	2.75	3.45	2.35	0.26	3.50
423022	12.00	8.00	3.25	4.45	2.25	0.24	5.50
473129	12.00	8.00	3.30	4.80	3.10	0.28	5.50
903028	16.00	8.00	3.25	9.25	3.05	0.35	7.50

Reel Dimension (mm)

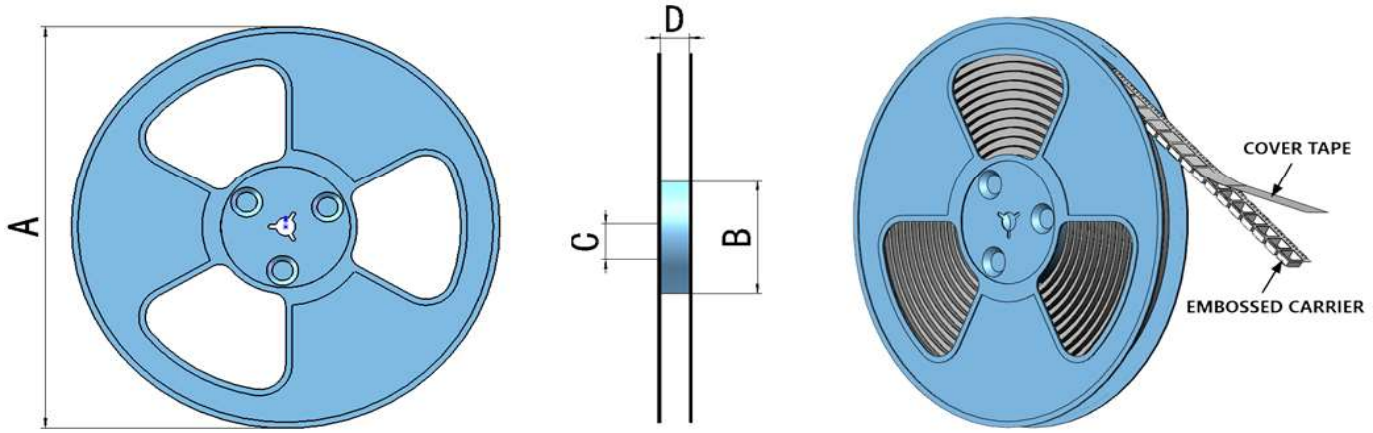

SIZE/mm	Reel Size	A	B	C	D	QTY / Reel
302922	13” × 12 mm	330	100	13.5	12.5	3,000 PCS
322521	7" x 8 mm	178	60	13.5	8.4	1,000 PCS
423022	13” × 12 mm	330	100	13.5	12.5	4,000 PCS
473129	13” × 12 mm	330	100	13.5	12.5	3,000 PCS
903028	7" x 16 mm	178	60	13.5	16.7	500 PCS

Tearing Off Force

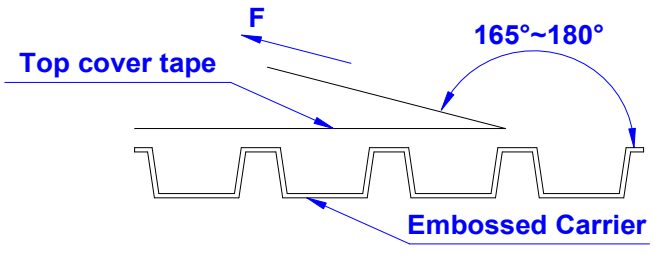

The force for tearing off cover tape is 10 to 130 grams in the arrow direction under the following conditions (referenced ANSI / EIA - 481 - D - 2008 of 4.11stadnard).

Room Temp. (°C)	Room Humidity (%)	Room Atm. (hPa)	Tearing Speed (mm / min)
5 ~ 35	45 ~ 85	860 ~ 1060	300

Product Series :	**GBC**	**Brand :**	GOTREND
File Version :	GBC-SERIES	**Prepared by :**	Yinghui Guo
Established Date	2021.04.27	**Description :**	SMD Ferrite Bead
Latest Edit Date :	2026.04.22	**Product Type :**	☑ Standard ☐ Customize

Packaging Information :

Box Package :



7" Small Box

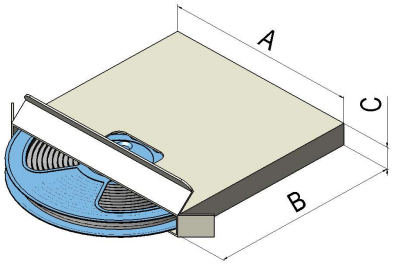

13" Small Box

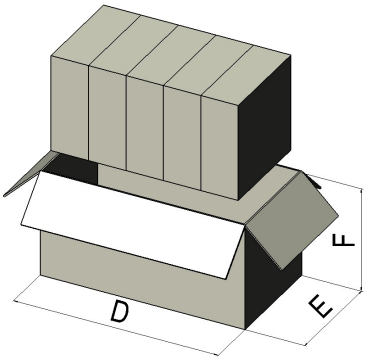

7" Large Box

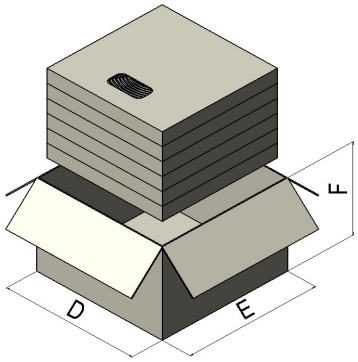

13"Large Box

SIZE/mm	Rells size	A	B	C	Large Box size	D	E	F	Reels in Small Box (QTY)	Small Box in Large Box(QTY)
302922	13"	335	335	40	13"	350	350	220	2(6,000)	5(30,000)
322521	7"	190	195	75	7"	408	210	220	5(5,000)	5(25,000)
423022	13"	335	335	40	13"	350	350	220	2(8,000)	5(40,000)
473129	13"	335	335	40	13"	350	350	220	2(6,000)	5(30,000)
903028	7"	190	195	75	7"	408	210	220	3(1,500)	5(7,500)