

Product Series Code	GRB	Brand	GOTREND
File Version	GRB0415P-045A26YDP	Editor	Terry
Established Date	2016.07.22	Description	Dip R Choke
Latest Edit Date	2016.07.22	Pages	Page : 2

Features & Application:

- * Drum Choke with low cost and high reliability.
- * Fit for power line & signal line circuit
- * To help you go pass the CE/FCC standard.
- * Mobile Device / Handheld Device / LowProfile Device / Panel...

Part No Example:

GRB 0415 P - 045 A 26 Y DP
 1 2 3 4 5 6 7 8

- GOTREND Series : GRB
- Core Dimension Code : Width x Length
- P = Pb free < 1000ppm
- Wire Size : 045 = 0.45 mm etc.
- Wire Count : A = Single , B = 2 Wire , C = 3 Wire etc.
- Wire Turns : 26 = 26.0 Turns
- Wire Color : Y = Copper Yellow , R = Copper Red
- Pin Foot : DP = Dip

Custom Design @ 1.0KHz , 0.25V

P/N	Inductance (uH)	DCR (m Ohm)	
GRB0415P-045A26YDP	10.0 uH +/- 10%	60.0 max.	

Test Equipment :

- * HP4284A, HP42841A- L, IDC, Q, RDC
- * HP8753D NETWORK ANALYZER- SRF

Standard Atmospheric Conditions:

Ambient Temp: 20 +/- 15°C

Relative Humidity: 65 +/- 20%

If there may be any doubt on the result, measurement shall be made within the following limits:

Ambient Temp: 25 +/- 5°C

Relative Humidity: 75 +/- 10%

Operating & Storage Condition:

OPERATING TEMP: -20 ~ +85°C

STORAGE TEMP: -20 ~ +85°C


STORAGE LIFE TIME: 12 MONTH @ 25°C , RH 65%

Attention & Caution:

Please avoid following matters:

- * Splashing water or salt water
- * Toxic Gas (Hydrogen sulfide, Sulfurous acid, Chlorine, Ammonia)
- * Vibrations or shocks which exceed the specified condition
- * Dew condensates
- * Please be careful for the stress to this product by board flexure or something after the mounting.


Product Structure



2005 RoHS Compliant - SGS Certified Result


鉛 Pb	鎘 Cd	汞 Hg	六價鉻 Cr+6	溴化聯苯 PBB	溴化聯苯 醌PBDE
<1000ppm	ND	ND	ND	ND	ND


DIMENSION : [mm]

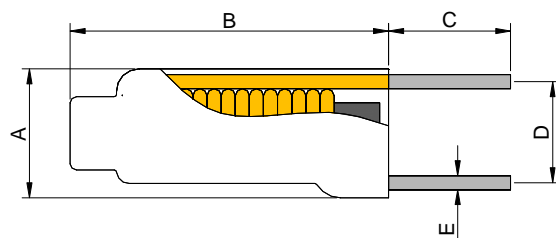

A	B	C	D	E
6.5 Max.	16.0 Max.	5.0 +/- 2.0	6.0 (Ref)	0.45 +/- 0.10

SCHEMATIC:





Product Series Code	GRB	Brand	GOTREND
File Version	GRB0415P-045A26YDP	Editor	Terry
Established Date	2016.07.22	Description	Dip R Choke
Latest Edit Date	2016.07.22	Pages	Page : 3

NO	ITEM	TEST CONDITIONS	Sample Qty/pcs	Spec	Result																
1	Dimension 本體相關呎吋	Actual Size ...	10	Meet Spec	ok																
2	Thermal Shock (Temperature Cycle) 溫度循環試驗	Temperature:-20 ° C/ +85 ° C kept stabilized for 30 minutes each Cycle: 100 Cycles(power off)	10	Elec. no variation Appearance no deformation	ok																
3	Humidity Resistance 耐濕試驗	Humidity: 90% ~ 95% RH Temperature: 40± 2 ° C Test Time: 120± 2 Hours	10	Elec. no variation Appearance no deformation	ok																
4	High Temperature 耐熱試驗	Temperature: 85± 2 ° C Humidity: 20% Testing Time: 120± 2 Hours	10	Elec. no variation Appearance no deformation	ok																
5	Low Temperature 耐寒試驗	Temperature: -20 ± 2 ° C Time: 120± 2 Hours	10	Elec. no variation Appearance	ok																
6	Temperature and Humidity Cycle 溫/濕度循環試驗	<table border="1"> <thead> <tr> <th>Step</th> <th>Temp</th> <th>Humidity</th> <th>Time</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>25± 2 ° C</td> <td>95~100%RH</td> <td>3.0Hr</td> </tr> <tr> <td>2</td> <td>55± 2 ° C</td> <td>95~96%RH</td> <td>9.5Hr</td> </tr> <tr> <td>3</td> <td>25± 2 ° C</td> <td>95~100%RH</td> <td>9.5Hr</td> </tr> </tbody> </table>	Step	Temp	Humidity	Time	1	25± 2 ° C	95~100%RH	3.0Hr	2	55± 2 ° C	95~96%RH	9.5Hr	3	25± 2 ° C	95~100%RH	9.5Hr	10	Elec. no variation Appearance no deformation	ok
Step	Temp	Humidity	Time																		
1	25± 2 ° C	95~100%RH	3.0Hr																		
2	55± 2 ° C	95~96%RH	9.5Hr																		
3	25± 2 ° C	95~100%RH	9.5Hr																		
7	Vibration 振動性試驗	Frequency: 10Hz~55Hz Amplitude: 1.5mm Direction: X,Y,Z Time: 2 Hours each	10	Elec. no variation Appearance no deformation	ok																
8	Soldering Heat Resistance 耐熱 焊性試驗	Preheat: 120 ~ 150 ° C (6 sec) Solder: H63A (eutectic solder) Solder Temp.: 260 ± 5 ° C Flux: Rosin Dip time: 10± 1 seconds	10	Elec. no variation Appearance no deformation	ok																
9	High-Voltage 高壓電擊試驗	100 V DC between core & winding	10	Elec. no variation Appearance no deformation	ok																
10	ORT: on going reliability test 負載電氣試驗	Elec loading & spec test... base on Spec for approval	10	Elec. no variation Appearance no deformation	ok																

BOX Package: cm

