



Product Series Code	GW	Brand	GOTREND
File Version	GW1065705PT-12C12RTN-V1R3	Editor	Teddy
Established Date	2014.06.05	Description	Wireless Charging Transmitter Coil
Latest Edit Date	2016.11.30	Pages	Page : 2

Features & Application :

- * Wireless charging transmitter coil
- * High permeability shielding for wireless charging transmitter coils
- * Blocks charging flux from sensitive components or batteries
- * High saturation powered iron - not affected by permanent locating magnets
- * Durable construction
- * Compliant to RoHS Directive 2002 / 95 / CE

Part No Example :

GW 1065705 P T - 12 C 12 R TN

1 2 3 4 5 6 7 8 9

1. Product Code : GW
2. Size Code : 106.0 x 53.0 x 4.0 mm
3. P = Pb Free < 1000ppm
4. [T] : TX
5. Wire Size : 12 = 1.2 mm etc.
6. Wire Count : A = Single , B = 2 Wire , C = 3 Wire etc.
7. Wire Turns (Ts) : 12 = 12.0 Ts
8. Wire Color : R = Copper Red
9. [TN] : Material Code

Test Equipment :

* HP4284A , HP42841A - L , IDC , Q , RDC

Standard Atmospheric Conditions :
 Ambient Temp : 20 +/- 15°C
 Relative Humidity : 65 +/- 20%
 If there may be any doubt on the result,
 measurement shall be made within the following limits :
 Ambient Temp : 25 +/- 5°C
 Relative Humidity : 75 +/- 10%

Operating & Storage Condition :

OPERATING TEMP : -25 ~ +85°C
 STORAGE TEMP : -40 ~ +85°C
 STORAGE LIFE TIME : 12 MONTH @25°C , RH 40~65%

Electrical Characteristics :

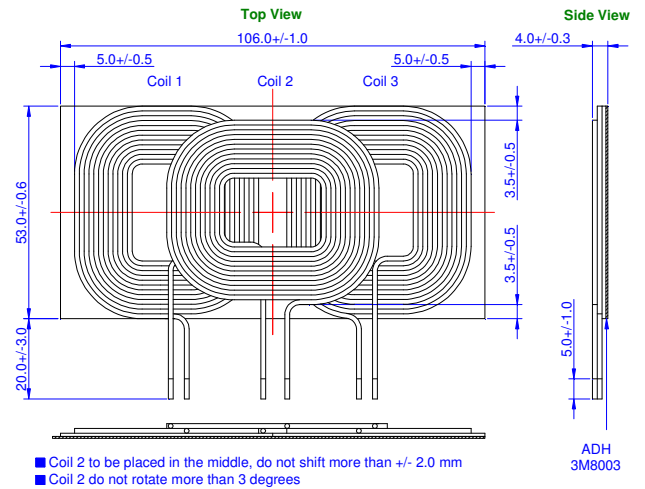
GOTREND PN	WPC PN	Inductance (uH)	Q	DCR (m Ohm)	Isat (A)	Irms (A)
GW1065705PT-12C12RTN	A6	11.5 +/- 10%	60.0 Typ..	60.0 +/- 20%	35.0 Max.	5.2 Max.

- * Inductance Test Condition : @100KHz,1.0Vrms, 25°C Ambient
- * Isat : Base on L drop 10% max.
- * Irms : Base on temp. rise up 40 deg.C max.
- * Electrical characteristics for each winding.

Product Structure

SMD	DIP	Shield	Unshield		
2005 RoHS Compliant - SGS Certified Result					
鉛 Pb	鎘 Cd	汞 Hg	六價鉻 Cr+6	溴化聯苯 PBB	溴化聯苯醚 PBDE
<1000ppm	ND	ND	ND	ND	ND

DIMENSION : [mm]


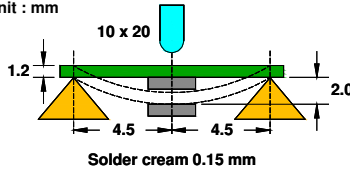


Attention & Caution :

- Please avoid following matters :
- * Splashing water or salt water
 - * Toxic Gas (Hydrogen sulfide, Sulfurous acid, Chlorine, Ammonia)
 - * Vibrations or shocks which exceed the specified condition
 - * Dew condenses
 - * Please be careful for the stress to this product by board flexure or something after the mounting.



Product Series Code	GW	Brand	GOTREND
File Version	GW1065705PT-12C12RTN-V1R3	Editor	Teddy
Established Date	2014.06.05	Description	Wireless Charging Transmitter Coil
Latest Edit Date	2016.11.30	Pages	Page : 3

NO	ITEM	TEST CONDITIONS	Sample Qty/pcs	Specification	Test Date	Result																
1	Dimension 本體相關呎吋	Actual Size ...	10	Meet Spec	2012/07/02 ~2012/07/02	ok																
2	Thermal Shock (Temperature Cycle) 溫度循環試驗	Temperature : -40 ° C~+85 ° C kept stabilized for 30 minutes each Cycle : 100 Cycle (Power off)	10	Elec. no variation Appearance no deformation	2012/07/02 ~ 2012/07/04	ok																
3	Humidity Resistance 耐濕試驗	Humidity: 90%~ 95% RH Temperature: 40± 2 ° C Test Time: 96± 2 Hours	10	Elec. no variation Appearance no deformation	2012/07/02 ~ 2012/07/06	ok																
4	High Temperature 耐熱試驗	Temperature: 85± 2 ° C Testing Time: 96± 2 Hours	10	Elec. no variation Appearance no deformation	2012/07/02 ~ 2012/07/06	ok																
5	Low Temperature 耐寒試驗	Temperature: -40 ± 2 ° C Time: 96± 2 Hours	10	Elec. no variation Appearance	2012/07/02 ~ 2012/07/06	ok																
6	Temperature and Humidity Cycle 溫/濕度循環試驗	<table border="1"> <thead> <tr> <th>Step</th> <th>Temp</th> <th>Humidity</th> <th>Time</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>25± 2 ° C</td> <td>90~95%RH</td> <td>3.0Hr</td> </tr> <tr> <td>2</td> <td>55± 2 ° C</td> <td>95~96%RH</td> <td>5.0Hr</td> </tr> <tr> <td>3</td> <td>25± 2 ° C</td> <td>90~95%RH</td> <td>3.0Hr</td> </tr> </tbody> </table> Cycle: 20 Cycles	Step	Temp	Humidity	Time	1	25± 2 ° C	90~95%RH	3.0Hr	2	55± 2 ° C	95~96%RH	5.0Hr	3	25± 2 ° C	90~95%RH	3.0Hr	10	Elec. no variation Appearance no deformation	2012/07/02 ~ 2012/07/06	ok
Step	Temp	Humidity	Time																			
1	25± 2 ° C	90~95%RH	3.0Hr																			
2	55± 2 ° C	95~96%RH	5.0Hr																			
3	25± 2 ° C	90~95%RH	3.0Hr																			
7	Vibration 振動性試驗	Frequency: 10Hz~50Hz Amplitude: 1.5mm Direction: X,Y,Z Time: 2 Hours each	10	Elec. no variation Appearance no deformation	2012/07/02 ~ 2012/07/02	ok																
8	Solderability 吃錫性試驗	Solder : Sn96.5 / Ag3.0 / Cu0.5 Per-Heating : 150± 10 ° C / 1min. to 2min. Solder Temperature: 245± 5 ° C Immersion Time 4s ± 1s Electrode shall be at least 75%	10	Elec. no variation Appearance no deformation	2012/07/02 ~ 2012/07/02	ok																
9	Iron Solder Heat Resistance 手焊耐熱試驗	Solder Temp. 350 ± 5 ° C Flux : Rosin Time : 3± 1 seconds	10	Elec. no variation Appearance no deformation	2012/07/02 ~ 2012/07/02	ok																
10	Bending Strength 折斷力試驗	Unit : mm  Force : 1Kg / min.	10	Elec. no variation Appearance no deformation	2012/07/02 ~ 2012/07/02	ok																
11	Flexure Strength 彎曲試驗	Unit : mm  Solder cream 0.15 mm	10	Elec. no variation Appearance no deformation	2012/07/02 ~ 2012/07/02	ok																
12	High-Voltage 高壓電擊試驗	100 V DC Between core & winding	10	Elec. no variation Appearance no deformation	2012/07/02 ~ 2012/07/02	ok																



Product Series Code	GW	Brand	GOTREND
File Version	GW1065705PT-12C12RTN-V1R3	Editor	Teddy
Established Date	2014.06.05	Description	Wireless Charging Transmitter Coil
Latest Edit Date	2016.11.30	Pages	Page : 4

Package Information:

BOX Package: cm

Small Box:500 pcs
Large Box:3000 pcs

